

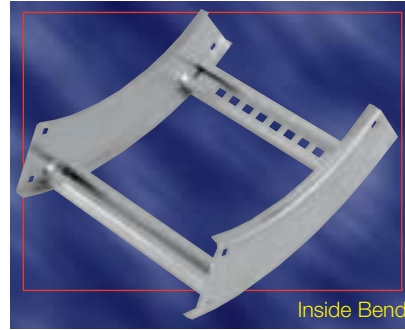



# Aluminum Cable Tray

# U-Style Fittings Vertical Bends

60°

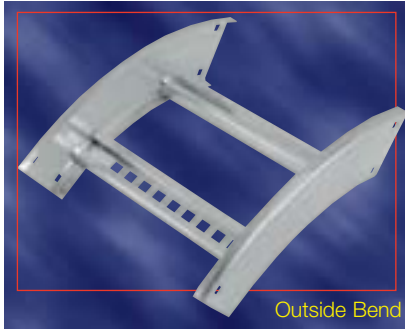

### Part Numbering System

**AUF-7-36-V-VO60-24**

Fitting Material and Siderail | Width | Fitting Type | Nominal Radius  
 Siderail Depth | Bottom Style | Degree

### Selection Guide

Inside Tray Widths: **6, 9, 12, 18, 24, 30, 36**

Angle: **60°**

Nominal Radius: **12, 24, 36, 48**

Bottom Styles: **L-** Ladder, **V-** Ventilated, **S-** Solid

Side Rail Depth: **4"- 7"**

### Technical Specifications

### 60° Vertical BEND — U-Style

Nominal Radius R	Width	Catalogue Number	(+ VO Siderail Height 4" - 7"			(+ VI Siderail Height														
			X	Y	Z	4"			5"			6"			7"					
			X	Y	Z	X	Y	Z	X	Y	Z	X	Y	Z	X	Y	Z			
<b>12</b>	6	AUF(+)-06-(*)-(+)-60-12																		
	9	AUF(+)-09-(*)-(+)-60-12																		
	12	AUF(+)-12-(*)-(+)-60-12																		
	18	AUF(+)-18-(*)-(+)-60-12	13,	7-1/2,	8-11/16	16-5/8,	11-11/16,	11-1/16	17-7/16,	12-5/8,	11-5/8	18-3/8,	13-11/16,	12-1/4	19-5/16,	14-3/4,	12-7/8			
	24	AUF(+)-24-(*)-(+)-60-12																		
	30	AUF(+)-30-(*)-(+)-60-12																		
36	AUF(+)-36-(*)-(+)-60-12																			
<b>24</b>	6	AUF(+)-06-(*)-(+)-60-24																		
	9	AUF(+)-09-(*)-(+)-60-24																		
	12	AUF(+)-12-(*)-(+)-60-24																		
	18	AUF(+)-18-(*)-(+)-60-24	23-7/16,	13-1/2,	15-5/8	27,	17-11/16,	18	27-13/16,	18-5/8,	16-9/16	28-3/4,	19-11/16,	19-3/16	29-11/16,	20-3/4,	19-13/16			
	24	AUF(+)-24-(*)-(+)-60-24																		
	30	AUF(+)-30-(*)-(+)-60-24																		
36	AUF(+)-36-(*)-(+)-60-24																			
<b>36</b>	6	AUF(+)-06-(*)-(+)-60-36																		
	9	AUF(+)-09-(*)-(+)-60-36																		
	12	AUF(+)-12-(*)-(+)-60-36																		
	18	AUF(+)-18-(*)-(+)-60-36	33-13/16,	19-1/2,	22-9/16	37-7/16,	23-11/16,	24-15/16	38-3/16,	24-5/8,	25-7/16	39-3/16,	25-11/16,	26-1/8	40-1/16,	26-3/4,	26-11/16			
	24	AUF(+)-24-(*)-(+)-60-36																		
	30	AUF(+)-30-(*)-(+)-60-36																		
36	AUF(+)-36-(*)-(+)-60-36																			
<b>48</b>	6	AUF(+)-06-(*)-(+)-60-48																		
	9	AUF(+)-09-(*)-(+)-60-48																		
	12	AUF(+)-12-(*)-(+)-60-48																		
	18	AUF(+)-18-(*)-(+)-60-48	44-3/16,	25-1/2,	29-7/16	47-13/16,	29-11/16,	31-7/8	48-9/16,	30-5/8,	32-3/8	49-9/16,	31-11/16,	33-1/16	50-7/16,	32-3/4,	33-5/8			
	24	AUF(+)-24-(*)-(+)-60-48																		
	30	AUF(+)-30-(*)-(+)-60-48																		
36	AUF(+)-36-(*)-(+)-60-48																			

(†) Insert side rail depth. (\*) Insert bottom style to complete Catalogue Number. (+) Insert "VO" for vertical outside or "VI" for vertical inside. Includes 1 pair of splice plates with hardware.

T&B aluminum cable tray is composed of two distinct systems H-Style and U-Style. These systems are interchangeable.